



www.car-rep.fi

PATENTED

2K PRIMER FILLER






HIGH COVERAGE STRONG BOND VERY HARD PETROL RESISTANT

MATERIAL



HARDNESS

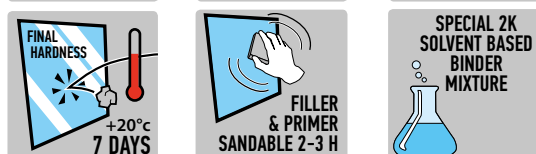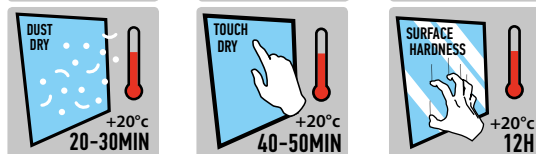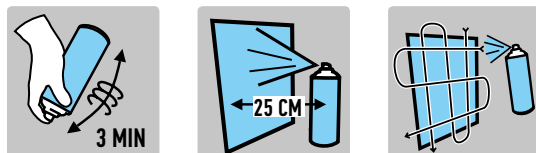

CAR-REP® 2K is designed to optimize working hours. The 2-component epoxy compound ensures excellent anti-corrosion properties, high filling power, easy application, fast drying time and good sandability. For maximum adhesion and corrosion resistance, Car-Rep® 2K Epoxy Fillers are recommended to be used together with Car-Rep® 2K Epoxy Primer. Can be used together with putties. Car-Rep® 2K Epoxy Filler can be applied outside spray booths, which is time and cost-efficient.

- Revolutionary long potlife with WISE 2K™ technology: Whole product can be used with no wasted paint
- Always ready-to-use: No activation required
- Superior adhesion and filling power
- Extreme anti-corrosion

BINDER

Special 2K solvent based binder mixture

DEGREE OF GLOSS (DIN 67530 60 °):

matt 0-25 gloss units

HEAT RESISTANCE: 150 °C

STORAGE STABILITY: 36 months

RECOAT: always, 2-3 minutes in between layers

SIZE: 500ml

SALES QTY: 6 pcs

Art Nr	CAR-REP 2K 500ml	Barcode
CR20030110	Spraypaint Car-Rep 2K EPOXY Filler White VP-1 500ml	6412490040826
CR20030120	Spraypaint Car-Rep 2K EPOXY Filler Light Grey VP-2 500ml	6412490040833
CR20030130	Spraypaint Car-Rep 2K EPOXY Filler Mid Grey VP-3 500ml	6412490040840
CR20030140	Spraypaint Car-Rep 2K PEPOXY Filler Dark Grey VP-4 500ml	6412490040857

WISE 2K® technology licensed by Wisepray International Ltd.
www.wisepray.com. Two component spray paint. One compartment can. Unlimited Potlife. WISE 2K® is a trademark or registered trademark of Wisepray International Ltd. International patents pending or granted. wisepray.com/patents

instructions VALID AT 20°C, relative air humidity 35% - 75%

MASTON OY • WWW.MASTON.FI • MASTON@MASTON.FI
Teollisuustie 10, FI-02880 Veikkola, Finland, Tel. +358 20 7188 580

MASTON